


LUMENE



Choose screws for mounting according to your wall or ceiling material
 The thickness of the wood ceilings must be ≥ 30 mm
 Choisissez les vis et les chevilles adaptées aux matériaux du mur ou du plafond
 L'épaisseur des plafonds en bois doit être ≥ 30 mm

MAJESTIC
 PREMIUM
 200V, 200C, 240V, 240C, 270C

Recommended for **fixed installation**

Configuration préconisée pour une **installation permanente**

Recommended for **traditional installation**


Configuration préconisée pour une **installation classique**

	Wall + Ceiling Mur + Plafond	Ceiling Plafond	Wall Mur	Wall Mur	Semi-suspended Semi-suspendu	Suspended Suspendu
1						
2	<p>On wall Au mur</p> <p>On ceiling Au plafond</p>	<p>On ceiling Au plafond</p>	<p>On wall Au mur</p>	<p>On wall Au mur</p>	<p>On ceiling Au plafond</p>	<p>On ceiling Au plafond</p>
3						
4	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>
5						


Update — Mise à jour : V2.0_30/08/2012-A




Side panel

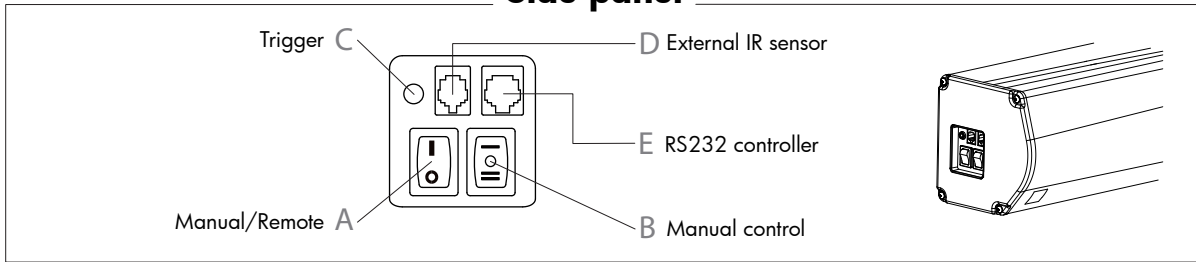


Power connection

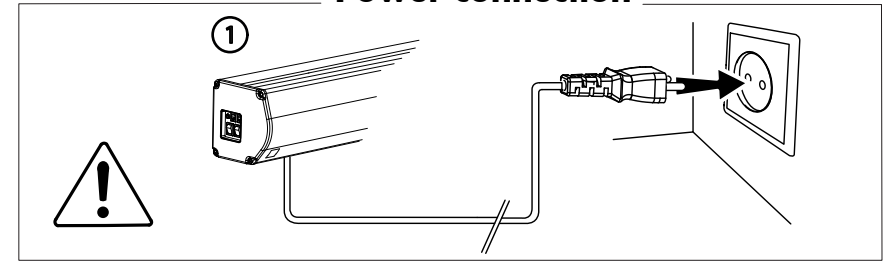

Control methods

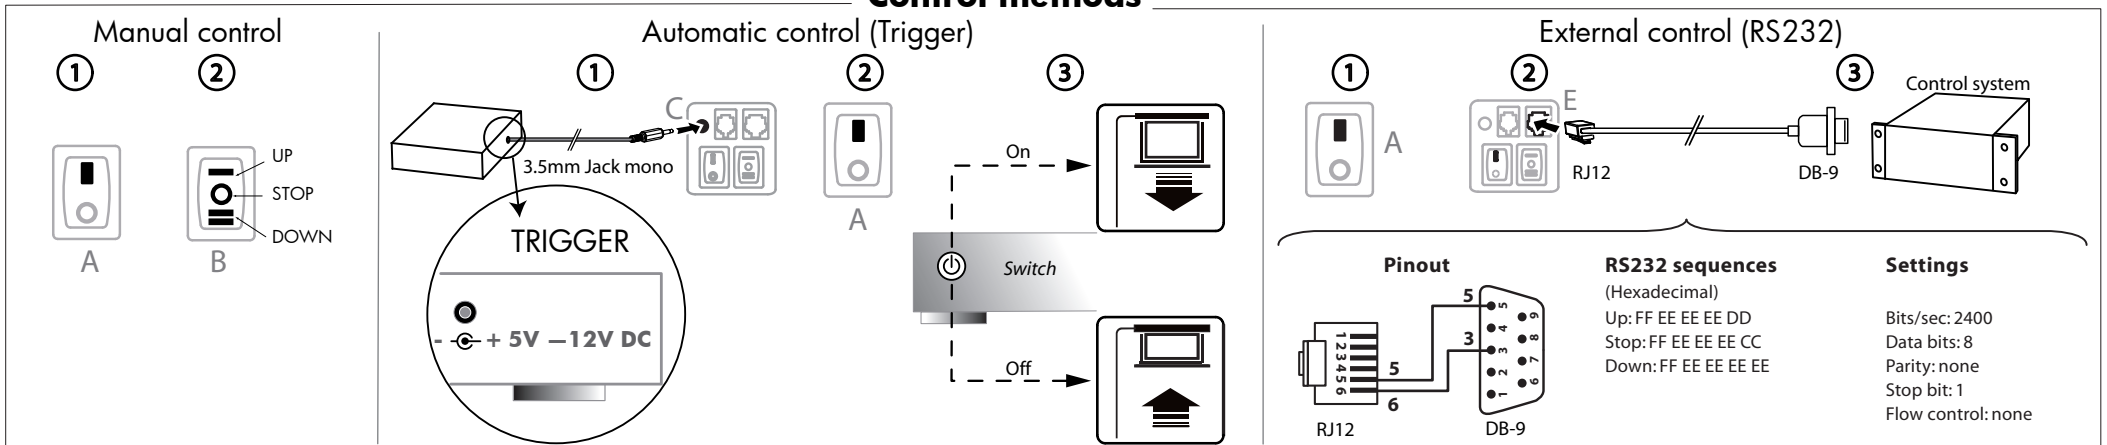

Infrared control

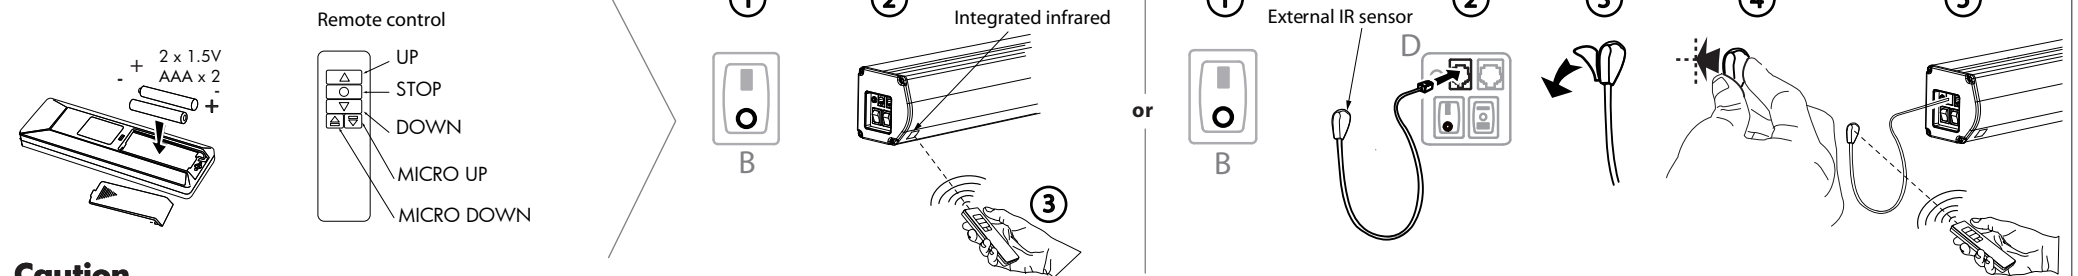


Caution

- Controller will work within 30 degrees away horizontally from the center of the receiver point within 8 meters from the screen.
- The controller will not work if the signal is covered by something.
- Keep the controller away from high temperature and humidity.
- Please change the battery when the signal is low.

- Please remove the battery from the remote control when the controller is not being used for a long time.
- Please use the same type of battery as originally supplied.
- If the receiver is to be out of use for a long time, please turn the electricity off or unplug it.

LUMENE



Choose screws for mounting according to your wall or ceiling material
 The thickness of the wood ceilings must be ≥ 30 mm
 Choisissez les vis et les chevilles adaptées aux matériaux du mur ou du plafond
 L'épaisseur des plafonds en bois doit être ≥ 30 mm

MAJESTIC

PREMIUM
 300V, 300C, 400V

Recommended for **fixed installation**

Configuration préconisée pour une **installation permanente**


Recommended for **traditional installation**

Configuration préconisée pour une **installation classique**


	Wall + Ceiling Mur + Plafond	Ceiling Plafond	Wall Mur	Wall Mur	Semi-suspended Semi-suspendu	Suspended Suspendu
1 						
2 	<p>x8 On wall Au mur</p> <p>D</p> <p>x8 On ceiling Au plafond</p> <p>D</p>	<p>x8</p> <p>D</p> <p>On ceiling Au plafond</p>	<p>x8</p> <p>D</p> <p>On wall Au mur</p>	<p>x8</p> <p>D</p> <p>On wall Au mur</p>	<p>x8</p> <p>D</p> <p>On ceiling Au plafond</p>	
3 						
4 	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>	<p>< 5 mm</p> <p>7 mm $< \varnothing < 11$ mm</p> <p>≈ 3 mm</p>
5 						



Side panel

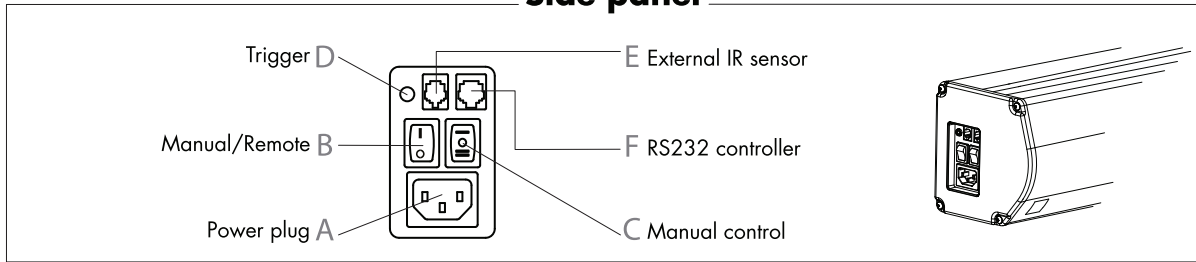


Power connection


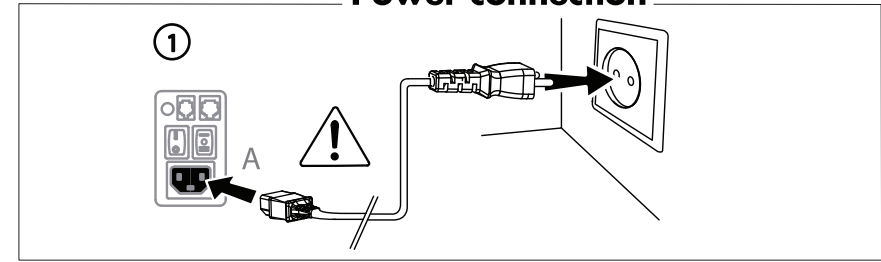


Control methods

Manual control





Automatic control (Trigger)

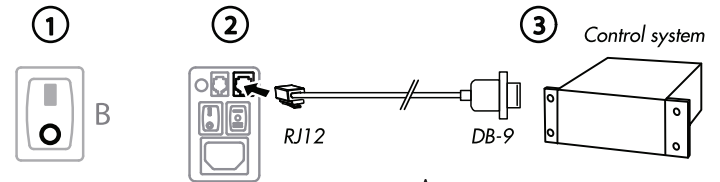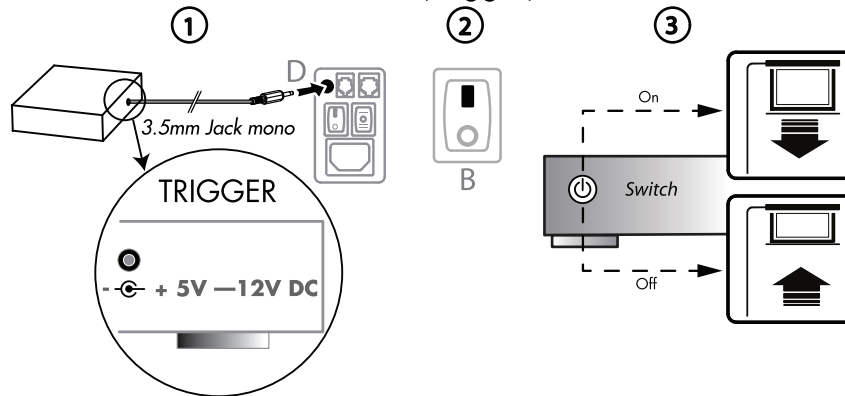

Pinout	RS232 sequences (Hexadecimal)	Settings
	Up: FF EE EE EE DD Stop: FF EE EE EE CC Down: FF EE EE EE EE	Bits/sec: 2400 Data bits: 8 Parity: none Stop bit: 1 Flow control: none

Infrared control

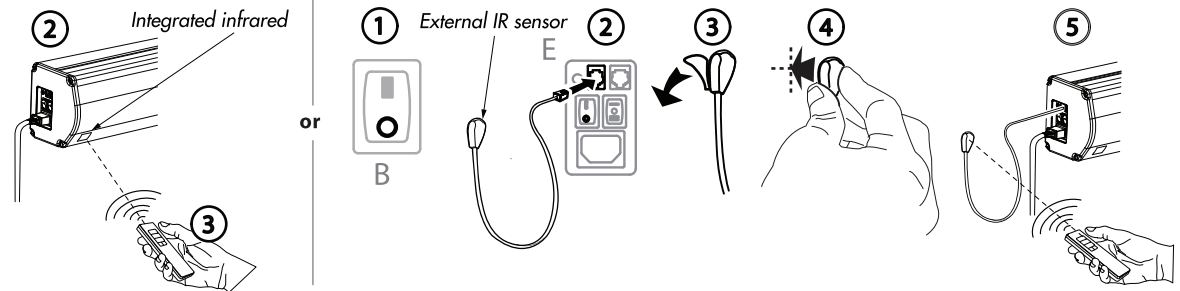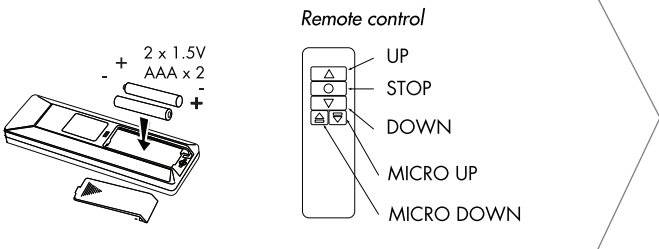

Caution

- Controller will work within 30 degrees away horizontally from the center of the receiver point within 8 meters from the screen.
- The controller will not work if the signal is covered by something.
- Keep the controller away from high temperature and humidity.
- Please change the battery when the signal is low.

- Please remove the battery from the remote control when the controller is not being used for a long time.
- Please use the same type of battery as originally supplied.
- If the receiver is to be out of use for a long time, please turn the electricity off or unplug it.



Congratulations and thank you for your choosing of a LUMENE projection screen.
This screen has been designed to offer a clear, bright and contrasted image.
It is also of a great reliability and very easy to use.

Important operating considerations:

Setting up is very easy but has to be done carefully to ensure its durability. Before first use, always position your screen horizontally on a stable and flat surface.


Warning:

- Don't put your finger inside the case when you retract the screen fabric back to the case.
 - Don't hang or put anything on the top of the screen case when your screen is unrolled.
 - Dust and scratches will lower the image of projection quality.
- Please pay particular attention to the following points:
- a. Do not touch the screen surface with your hand.
 - b. Do not draw on the screen surface.
 - c. Do not cruff or scratch the screen with hard sharp items subject to cause damage.
 - d. Never use chemicals to clean the screen surface.
- Make sure there is nothing on the screen before you retract it into the case.
 - To remove dust on the cloth, use a dry and soft-haired brush and rub it delicately.
 - Close the screen to protect the cloth.



- The motor will shut down after 4 minutes of use according to the self-protect purpose. When it occurs, you have to wait for 2 minutes to let the temperature of the motor come down.
- There is no need to add lubricant to the motor.
- And the motor is already in the right position in as it leaves the factory.
- Do not regulate the motor by yourself. Please call a specialist to help you on this.

Motor adjusting slot

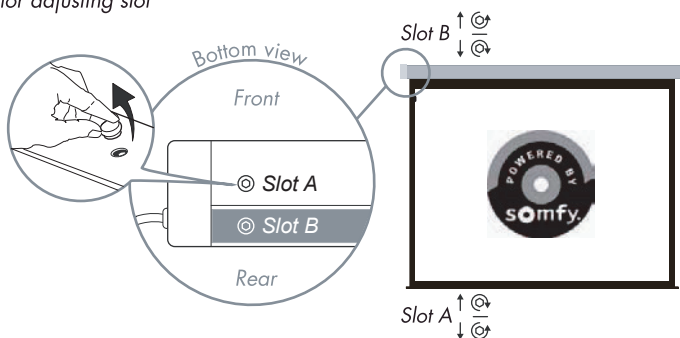

LIMITED WARRANTY:

All LUMENE products carry a two-year limited warranty period when purchased from LUMENE, a LUMENE distributor or a LUMENE authorized retailer. This warranty covers all defects in materials and workmanship in the product manufactured by LUMENE.

Warranty limitation and exclusions:

This warranty covers only the products purchased from LUMENE or a LUMENE authorized retailer or distributor and runs for a two-year period from the date of the purchase by the first end-user.
 Except in the following cases, this warranty covers any material or manufacturing defect. This limited warranty is subject to the following exceptions:

- The external case is damaged or deteriorated.
- The serial number has been removed, modified or made illegible.
- The defects or damage result from use of the products in a manner that is not normal or customary; improper operation or misuse; accident or neglect such as dropping the products onto hard surfaces; contact with water, rain, extreme humidity; contact with sand, dirt or the like; or contact with extreme heat, or spills of food or liquid.
- Physical damage to the surface of the product, including scratches, cracks or other damage.
- Non respect of the instructions supplied with the product.
- Damage due to the shipment of the product (claims have to be addressed to the carrier).
- Someone other than LUMENE or its authorized service centers attempts to maintain, alter, modify or service the product in any way.
- Any other damage due to the lack of technical knowledge or experience of the user without any link with defects of the product.

Any of these voids the warranty.

To be eligible for limited warranty coverage:

The limited warranty applies only to the first end-user. Any person exercising a claim under this limited warranty must show the proof of the date of purchase, such as the sales receipt or invoice, and that the product was purchased new. The warranty is strictly limited to the country of the original purchase.

Warranty related expenses:

LUMENE will take charge of all the expenses on parts and labor related to the repair or the replacement of the products. The expenses related to the shipping and insurance fees will be shared as described below.

To obtain warranty service:

During the warranty period, to exercise the limited warranty, the purchaser must first contact:

- 1) The original place of purchase,
- 2) The LUMENE local distributor,
- 3) LUMENE.

The warranty service for this device is limited to the country of original purchase. You will receive instructions on how to ship the product to the nearest designated LUMENE authorized Service Center. The product must also be packed in its original packaging or a similar package insuring an equal degree of protection. You must ship it with freight, duties and insurance prepaid. Regardless of where you are instructed to return the product, you must always include:

- a) A copy of your invoice, bill of sale or other comparable proof of purchase.
- b) A written description of the problem.
- c) The name and location of the place of purchase and, most importantly,
- d) Your address and telephone number.

Always retain your original proof of purchase.

Do not send any product back to a service center before prior agreement.

Upon receipt of the product, LUMENE or its authorized service center will check the product and will ship you a repaired or replacement product, freight and insurance expenses prepaid. If additional information is required, please contact your retailer or the LUMENE local distributor.

Limitation of liability:

Except where these dispositions are inapplicable or unlawful to state laws or other jurisdiction rights:

For any defective product, LUMENE sole liability is to repair or replace the product. By no means no event shall LUMENE be liable, whether in contract or tort (including negligence) for damages in excess of the purchase price of the product, or for any indirect, incidental, special or consequential damage of any kind or to any other products, or loss of revenue or profits, loss of business, or other financial loss arising out of or in connection with the ability or inability to use the product, to the full extent these damages may be disclaimed by law. Any litigation, which cannot be regulated by way of preliminary conciliation and relating to the interpretation or the execution of this Warranty and the obligations herein contained will be distinct definitively, according to the rules of conciliation and arbitration of the International Chamber of Commerce of Paris - France, by one or more referees named in accordance with its rules. The applicable law will be the French one.